


## SLITTA VARIFIX® TIPO GK-0



- in acciaio zincato
- scorrimento fino a 30 mm
- può essere montata su profilati o direttamente a soffitto
- temperatura d'esercizio: da 0°C a +120°C

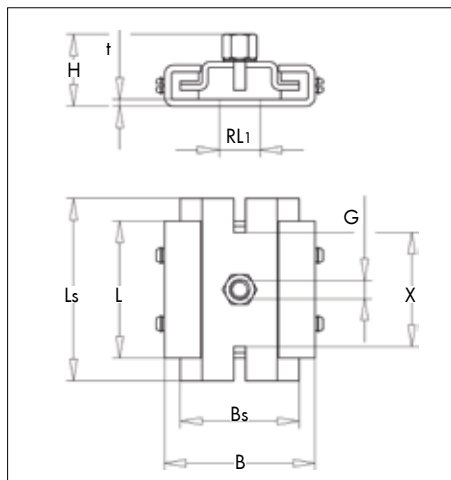

filetto	H [mm]	Ls [mm]	Bs [mm]	t [mm]	L [mm]	B [mm]	X [mm]	RL1 [mm]	carico ammissibile [N]	Art.
M8	31,5	80	52	3	60	66	30	13	800	<b>0862 700 130</b>
M10	34,5								1200	<b>0862 700 131</b>
M12	37,5								1500	<b>0862 700 132</b>

(10 N ~ 1 kg)